

Telehandler Concrete Skip - BSB




Telehandler Concrete Skip

The BSB telehandler concrete skip is specially designed for low-height loading under site mixers (730mm loading height). Supplied with a 1-metre hose for precise placement.

Dual handling – forklift pockets with safety locking system and crane lifting points. Lever-operated gate (adjustable front or rear position).

Ideal for efficient, safe concrete transfer on busy sites.

Model Ref	Capacity (Litres)	SWL (kg)	Weight (kg)
BSB 500	500	1200	155

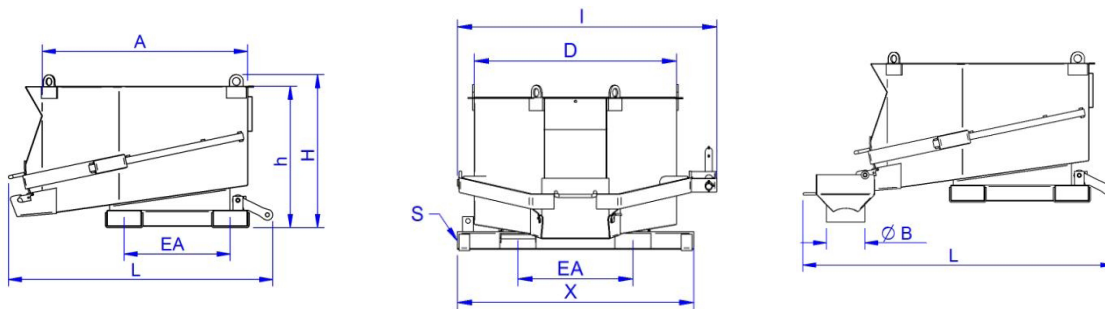

Funnel Options

- 90mm Diameter
- 150mm Diameter
- 200mm Diameter
- 250mm Diameter

Measurements	A (mm)	ØB (mm)	D (mm)	EA (mm)	h (mm)	S (mm)	X (mm)	L x I x H (mm)
BSB 500	1041	200	944	540	713	170 x 75	1110	1610x1218x771

Features & Benefits

- Low loading height (730mm) – ideal for site mixers
- Dual handling – forklift pockets with safety locking + crane lifting points
- Adjustable lever-operated gate (front or rear position)
- 1-metre hose for precise concrete placement
- Robust construction for reliable site use

