



Carriage Mounted Carpet Boom

Our popular carriage mounted carpet boom provides a safe, efficient solution for lifting and transporting carpets, rolled floor coverings, and similar materials. The unique threaded pole construction eliminates stress weld failure risks common in inferior designs.


Made from high-grade EN19T steel with bearing plates and shrink rings to absorb shock loads during transit. Leading edge nose cone ensures easy glide-in and protects rolls.

Choose our carpet boom for durability, safety, and reliable performance.

Model Ref	Class 2		Class 3		C (mm)	D (mm)	L (mm)	Capacity @ 2000m (kg)	Weight (kg)	
	A (mm)	B (mm)	A (mm)	B (mm)					Class 2	Class 3
CMBS 70-3050	400	500	500	600	140	70	3050	384	197	245
CMBS 70-3660	400	500	500	600	140	70	3660	384	215	263
CMBS 70-4000	400	500	500	600	140	70	4000	384	223	280
CMBS 75-3050	400	500	500	600	140	75	3050	480	210	259
CMBS 75-3660	400	500	500	600	140	75	3660	480	231	280
CMBS 75-4000	400	500	500	600	140	75	4000	480	236	300
CMBS 85-3050	400	500	500	600	140	85	3050	700	240	289
CMBS 85-3660	400	500	500	600	140	85	3660	700	267	294
CMBS 85-4000	400	500	500	600	140	85	4000	700	283	310

Bolt on bottom blocks supplied as standard.

Booms can be fitted with 'Quick Release' bottom blocks as an optional alternative

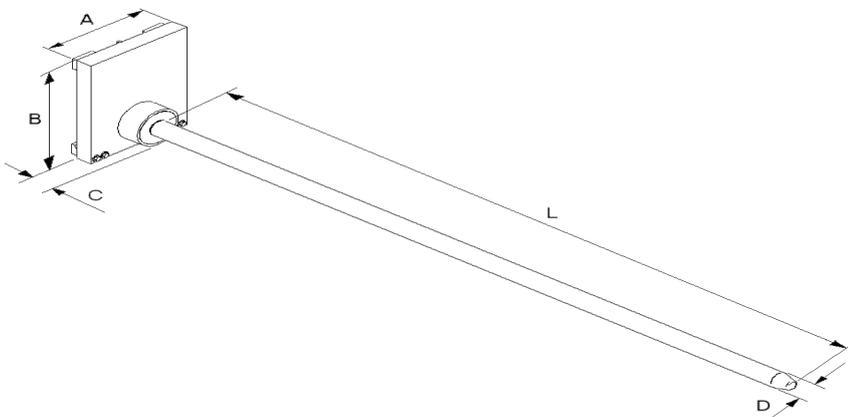

Features & Benefits

- Threaded pole design – enhanced strength and long-term durability
- No welding – eliminates risk of stress weld failure
- High-grade EN19T steel for strong, durable service life
- Bearing plate and shrink ring combination absorbs shock loads
- Leading edge nose cone – easy glide-in and roll protection