



## Forklift Jib - Articulating Extender

The Articulating Extender Jib is designed for handling loads at variable heights and extended distances. With its telescopic beam and two hook positions, it offers greater reach and flexibility than a conventional fixed jib.



The lifting beam can be adjusted to 45° in 15° increments, making it ideal for awkward or elevated loads.

Available in five models to suit different forklift capacities, the jib is CE-marked and supplied with a Certificate of Conformity for safe operation..

Capacity (kg) at load centre (mm)

| Model Ref    | Min Truck Capacity (kg) | 1000 | 1250 | 1500 | 1750 | 2000 | 2250 | 2500 | 2750 | 3000 |
|--------------|-------------------------|------|------|------|------|------|------|------|------|------|
| FMXA-500-2.2 | 2500                    | 1400 | 1100 | 1000 | 830  | 750  | 560  | 440  | 320  | 230  |
| FMXA-500-2.7 | 3000                    | 1450 | 1200 | 1100 | 900  | 840  | 670  | 490  | 360  | 270  |
| FMXA-500-3.1 | 3500                    | 1900 | 1500 | 1200 | 1000 | 900  | 730  | 580  | 450  | 370  |
| FMXA-500-3.5 | 4000                    | 2000 | 1600 | 1300 | 1100 | 1000 | 820  | 670  | 540  | 460  |
| FMXA-500-4.4 | 5000                    | 2700 | 2200 | 1850 | 1400 | 1100 | 900  | 750  | 620  | 500  |

Weight of FMXA-500-2.2 : 204kgs / Weight of all other models : 305kgs

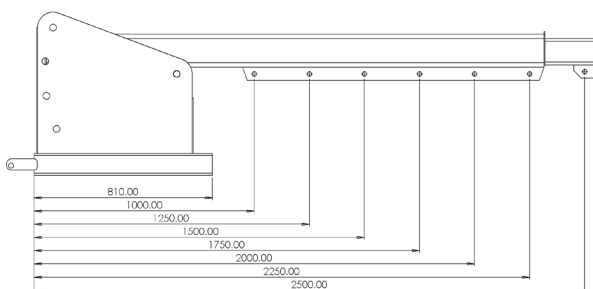

| Model Ref    | A (mm) | B (mm) | C (mm) | D (mm) |
|--------------|--------|--------|--------|--------|
| FMXA-500-2.2 | 190    | 70     | 424    | 652    |
| FMXA-500-2.7 | 190    | 90     | 576    | 740    |
| FMXA-500-3.1 | 190    | 90     | 576    | 576    |
| FMXA-500-3.5 | 190    | 90     | 576    | 576    |
| FMXA-500-4.4 | 190    | 90     | 576    | 576    |

## Features & Benefits

- Adjustable beam to 45° in 15° increments – ideal for variable height loads
- Telescopic reach up to 3000mm for greater load centres
- Two hook positions for flexible load handling
- Raised hook design improves visibility and safety
- Jib rated to suit forklift capacity – reduces wear and overload risk