

Forklift Jib - Articulating Extender



Forklift Jib - Articulating Extender



The Articulating Extender Jib is designed for handling loads at variable heights and extended distances. With its telescopic beam and two hook positions, it offers greater reach and flexibility than a conventional fixed jib.

The lifting beam can be adjusted to 45° in 15° increments, making it ideal for awkward or elevated loads.

Available in five models to suit different forklift capacities, the jib is CE-marked and supplied with a Certificate of Conformity for safe operation..

Capacity (kg) at load centre (mm)										
Model Ref	Min Truck Capacity (kg)	1000	1250	1500	1750	2000	2250	2500	2750	3000
FMXA-500-2.2	2500	1400	1100	1000	830	750	560	440	320	230
FMXA-500-2.7	3000	1450	1200	1100	900	840	670	490	360	270
FMXA-500-3.1	3500	1900	1500	1200	1000	900	730	580	450	370
FMXA-500-3.5	4000	2000	1600	1300	1100	1000	820	670	540	460
FMXA-500-4.4	5000	2700	2200	1850	1400	1100	900	750	620	500

Weight of FMXA-500-2.2 : 204kgs / Weight of all other models : 305kgs

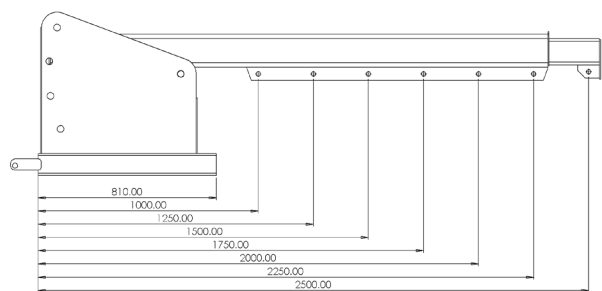

Model Ref	A (mm)	B (mm)	C (mm)	D (mm)
FMXA-500-2.2	190	70	424	652
FMXA-500-2.7	190	90	576	740
FMXA-500-3.1	190	90	576	576
FMXA-500-3.5	190	90	576	576
FMXA-500-4.4	190	90	576	576

Features & Benefits

- Adjustable beam to 45° in 15° increments – ideal for variable height loads
- Telescopic reach up to 3000mm for greater load centres
- Two hook positions for flexible load handling
- Raised hook design improves visibility and safety
- Jib rated to suit forklift capacity – reduces wear and overload risk