

Forklift Jib - Tele-Liner Range





Forklift Jib - Tele-Liner Range

The Tele-Liner Jib is an inexpensive, low-profile attachment that provides extended reach for handling loads that are difficult to palletise. Its mechanically extending inner section allows loads to be picked up at greater distances.

Supplied with two hooks and shackles that can be positioned at any of eleven lifting points for maximum flexibility.

Capacity (kg) at load centre (mm)

Model Ref	Min Truck Capacity (kg)	500	750	1000	1250	1500	1750	2000	2250	2500	2750	3000
LLX 500-1.8	2000	1800	1400	1100	900	720	580	500	360	330	260	210
LLX 500-2.2	2500	2200	1700	1400	1100	1000	850	750	560	440	320	230
LLX 500-2.7	3000	2700	1900	1450	1200	1100	900	840	670	490	360	270
LLX 500-3.1	3500	3100	2400	1900	1500	1200	1000	900	730	580	450	370
LLX 500-3.5	4000	3500	2700	2000	1600	1300	1100	1000	820	670	540	460
LLX 500-4.4	5000	4400	3400	2700	2200	1850	1400	1100	900	750	620	500
Weight (kg)	-	100	103	186	186	186	186	186	186	186	186	186

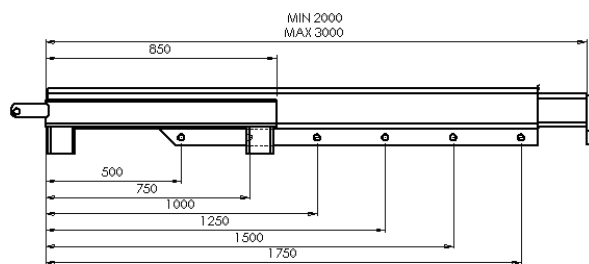

Features & Benefits

- Low-profile design – better access in confined spaces
- Mechanically extending inner section – reaches up to 3000mm
- Eleven lifting positions with two hooks and shackles
- Jib rated to suit the forklift capacity – reduces wear and overload risk
- Multiple hook positions for flexible load handling
- Heel retaining pins for secure attachment to the forklift

Model Ref	A (mm)	B (mm)	C (mm)	D (mm)
LLX 500-1.8	220	140	390	60
LLX 500-2.2	220	140	390	60
LLX 500-2.7	240	180	540	80
LLX 500-3.1	240	180	540	80
LLX 500-3.5	240	180	540	80
LLX 500-4.4	240	180	540	80