


Telehandler Skip - Teleskip

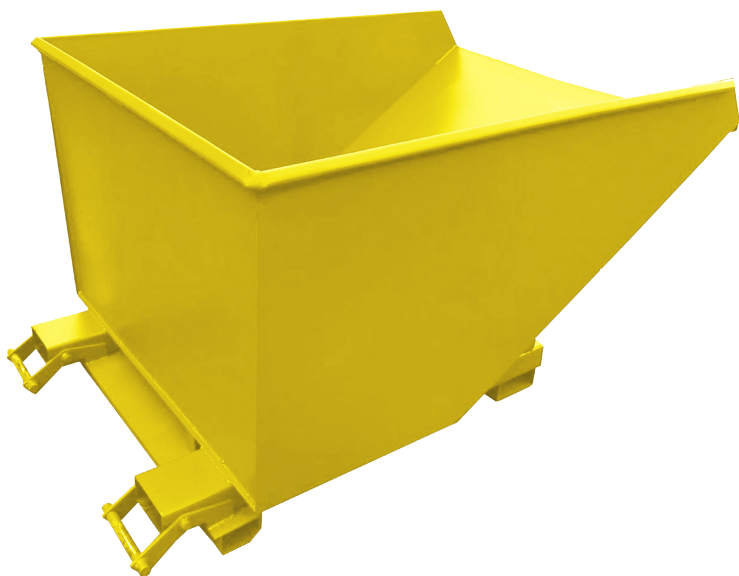

With automatic locking / unlocking to the forks, the Teleskip offers ultimate safety and efficiency and negates the need for the driver to leave the cab.

Standard pallet width forks reduces the need for fork adjustment, again reducing the need for the driver to exit the cab.

Containing 30% more steel than our main competitor, the Teleskip offers a far more durable and robust skip, capable of withstanding harsh and arduous site conditions.

Reinforced triangulated top edge adds additional strength whilst offering protection from falling objects from above (such as bricks being dropped into the skip)

The Gas strut is protected by a strut guard by means of a solid steel channel which not only protects the unit but also allows for easy maintenance access

Model Ref	Capacity (Ltr)	SWL (kg)	Height (mm)	Width (mm)	Length (mm)	Weight (kg)
RFS-TS-500	500	2000	820	1070	1620	190
RFS-TS-750	750	2000	820	1260	1620	195
RFS-TS-1250	1250	2000	960	1320	1900	205
RFS-TS-1750	1750	2000	1140	1550	1900	305

Features & Benefits

- Auto locking / unlocking behind fork heel for safety and improved efficiency
- Standard pallet width fork pockets
- 30% more steel than our main competitor provides a far more durable skip
- Fully reinforced triangulated top edging for added strength
- Full length pocketed tunnels with 9mm steel reinforcement at entry to cater for rough handling
- Gas strut protected by strut guard by means of a solid steel channel
- 4 way entry allows the skip to be handled from any angle