

Tipping Skips - Stainless Steel Range



Suitable for use in a multitude of industries, our forklift tipping skips help keep working areas clear and allow safe and speedy removal of scrap or rubbish to the appropriate waste receptacle or collection point

Manufactured entirely from stainless steel, this range of skips is ideally suited to industries where corrosion resistance and minimisation of contamination is vital

Manufactured from 3mm gauge steel

Model Ref	Volume Capacity (m ³)	Load Capacity (kg)	Weight (kg)	
RFS 25L-SS	0.25	1000	109	
RFS 40L-SS	0.40	1000	125	
RFS 80L-SS	0.80	1000	177	
RFS 120L-SS	1.20	1250	198	
RFS 160L-SS	1.60	1500	220	
RFS 200L-SS	2.00	1500	248	

Features & Benefits

- Manufactured entirely from stainless steel, offering non-corrosive and spark proof properties
- Full width release handles eliminates need to lean in between the skip and truck mast
- Heavy duty steel underframe offering long service life properties
- Twin locking mechanism for added safety to ensure skip is locked if loaded unevenly
- Pre-drilled castor plates for retro fitment of castors (no welding required)
- Safety security chain to ensure safe retention to forklift truck
- Bolted tipping handle for easy replacement (no welding required)


Suitable for use in potentially hazardous and explosive areas, ATEX certification is also available with this range of tipping skips



Tel: 0800 028 3332 (UK) Inter: +44 (0)1686 611 200 Fax: +44 (0)1686 611 201 Email: sales@forklift-attachments.co.uk Contact Attachments Ltd, Unit E, Mochdre Industrial Estate, Newtown, Powys, SY16 4LE, Wales, United Kingdom

www.forklift-attachments.co.uk



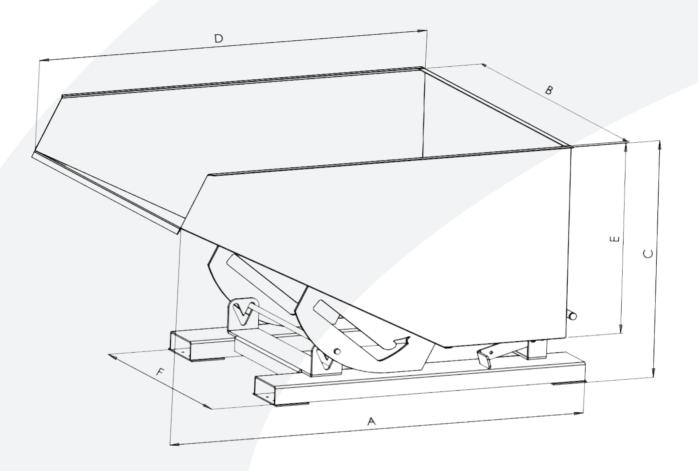

Maximum Fork Section 150mm x 60mm

Model Ref	O/all Length A (mm)	Bin Width B (mm)	O/all Height C (mm)	Bin Length D (mm)	Bin Height E (mm)	Fork Spread F (mm)
RFS 25L-SS *	1109	794	696	1025	547	890
RFS 40L-SS *	1360	794	776	1197	547	890
RFS 80L-SS	1718	960	982	1540	750	890
RFS 120L-SS	1718	1200	982	1540	750	890
RFS 160L-SS	1718	1700	982	1540	750	890
RFS 200L-SS	1718	2125	982	1540	750	890

* For RFS 25L-SS and RFS 40L-SS models, please note the overall width is 925mm. For all other models, the bin width (dimension B) is the widest point

Tel: 0800 028 3332 (UK) Inter: +44 (0)1686 611 200 Fax: +44 (0)1686 611 201 Email: sales@forklift-attachments.co.uk Contact Attachments Ltd, Unit E, Mochdre Industrial Estate, Newtown, Powys, SY16 4LE, Wales, United Kingdom



Enhance your skip with the following



Lids

Contain rubbish and control unwanted odours



Auto Release Kit

Automatically tip the skip for safer operation at height (adds 130mm to overall skip height)



Mesh Extensions

Increases volumetric capacity of the skip by adding 500mm to height



Castors

For easy manoeuvrability when forklift not in use (adds 130mm to overall skip height)



Lifting Lugs

Allows skip to be lifted by overhead crane



Drain Tap & Filter

Enables liquid to drain from skip base

Tel: 0800 028 3332 (UK) Inter: +44 (0)1686 611 200 Fax: +44 (0)1686 611 201 Email: sales@forklift-attachments.co.uk Contact Attachments Ltd, Unit E, Mochdre Industrial Estate, Newtown, Powys, SY16 4LE, Wales, United Kingdom