


# Carriage Mounted Carpet Boom - CMBS

Our popular Carriage Mounted Carpet Boom offers an easy solution to the lifting and transport of carpets and all other floor covering or similar rolled materials.

With a unique threaded pole construction, the risk of stress weld failure is completely removed. Utilising high grade quality EN19T steel and a combination of bearing plates and shrink rings to absorb damaging shock loads during product transit, you can be assured our carpet booms are fit for purpose and designed for the task in hand

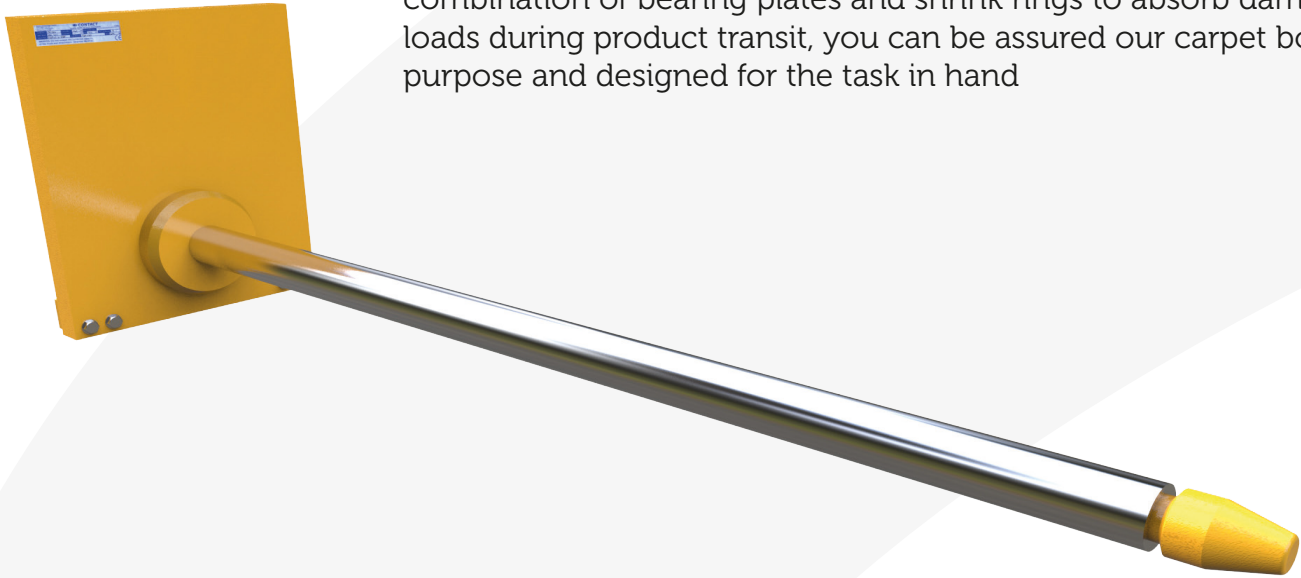


## Features & Benefits

- Threaded pole design offers enhanced strength properties and long-term durability
- No welding need with threaded pole design which eliminates possibility of stress weld failure (common with inferior booms)
- High grade EN19T steel, offering strong, durable and long service life properties
- Bearing plate and shrink ring combination absorbs damaging shock loads during transit
- Leading edge nose cone designed to avoid damage to the roll being handled whilst offering easy 'glide in' pick up
- CE marked and supplied with Certificate of Conformity to meet health and safety regulations

# Carriage Mounted Carpet Boom - CMBS

## Weights & Dimensions

	Class 2		Class 3	
Model Ref	Weight (kgs)	C of G (mm)	Weight (Kgs)	C of G (mm)
CMBS 70-3050	197	764	245	612
CMBS 70-3660	215	995	263	811
CMBS 70-4000	223	1240	280	1225
CMBS 75-3050	210	820	259	665
CMBS 75-3660	231	1061	280	877
CMBS 75-4000	236	1245	300	1230
CMBS 85-3050	240	922	289	767
CMBS 85-3660	267	1180	294	999
CMBS 85-4000	283	1100	310	1085

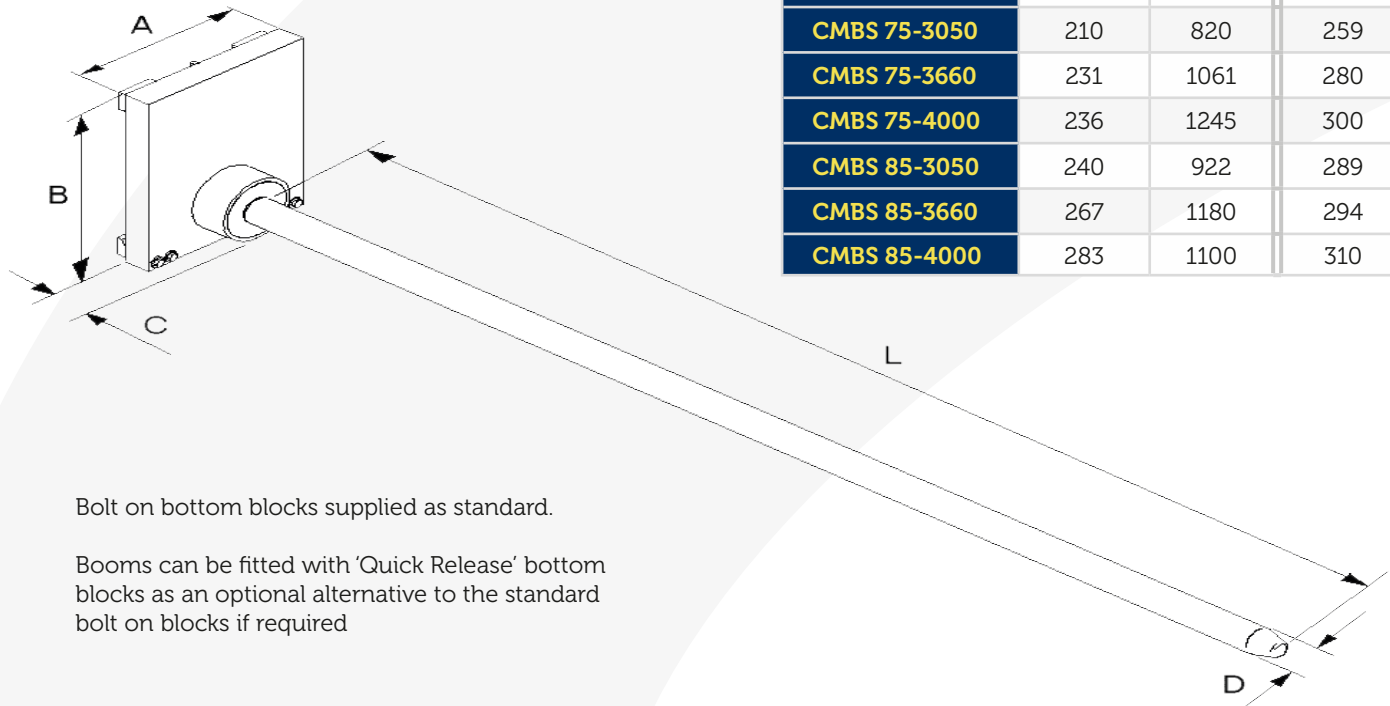

Bolt on bottom blocks supplied as standard.

Booms can be fitted with 'Quick Release' bottom blocks as an optional alternative to the standard bolt on blocks if required.

	Class 2		Class 3		'C' (mm)	'D' (mm)	'L' (mm)	Capacity @ 2000mm (Kgs)
Model Ref	'A' (mm)	'B' (mm)	'A' (mm)	'B' (mm)				
CMBS 70-3050	400	500	500	600	140	70	3050	384
CMBS 70-3660	400	500	500	600	140	70	3660	384
CMBS 70-4000	400	500	500	600	140	70	4000	384
CMBS 75-3050	400	500	500	600	140	75	3050	480
CMBS 75-3660	400	500	500	600	140	75	3660	480
CMBS 75-4000	400	500	500	600	140	75	4000	480
CMBS 85-3050	400	500	500	600	140	85	3050	700
CMBS 85-3660	400	500	500	600	140	85	3660	700
CMBS 85-4000	400	500	500	600	140	85	4000	700