

Crane Slung Platforms - Standard Range



Designed to be slung from the hook of an overhead crane.

When working at height is a requirement, our crane slung safety platforms provide a safe working deck to carry out such operations

With two methods of entry to choose from (through bars or side gate) you can be assured personnel can carry out their working at height in a safe and risk free manner

Supplied with lifting chains and safety harness


Model Ref	Method of entry	Max No of People	Capacity (kg)
FWP-CS-S	Through bars	4	500
FWP-CS-G	Side gate	4	500

Features & Benefits

- Supplied with four legged lifting chain for overhead use
- Lifting chains purposely positioned away from personnel within the platform for added safety
- Robust overhead guard protects personnel within the platform from falling objects from above
- Durable mild steel welded construction offering long service life properties
- Fitted with fork stirrups for safe and stable forklift positioning purposes
- Fully compliant with BS EN 14502 Regulations

Crane Slung Platforms - Standard Range

Platform Dimensions

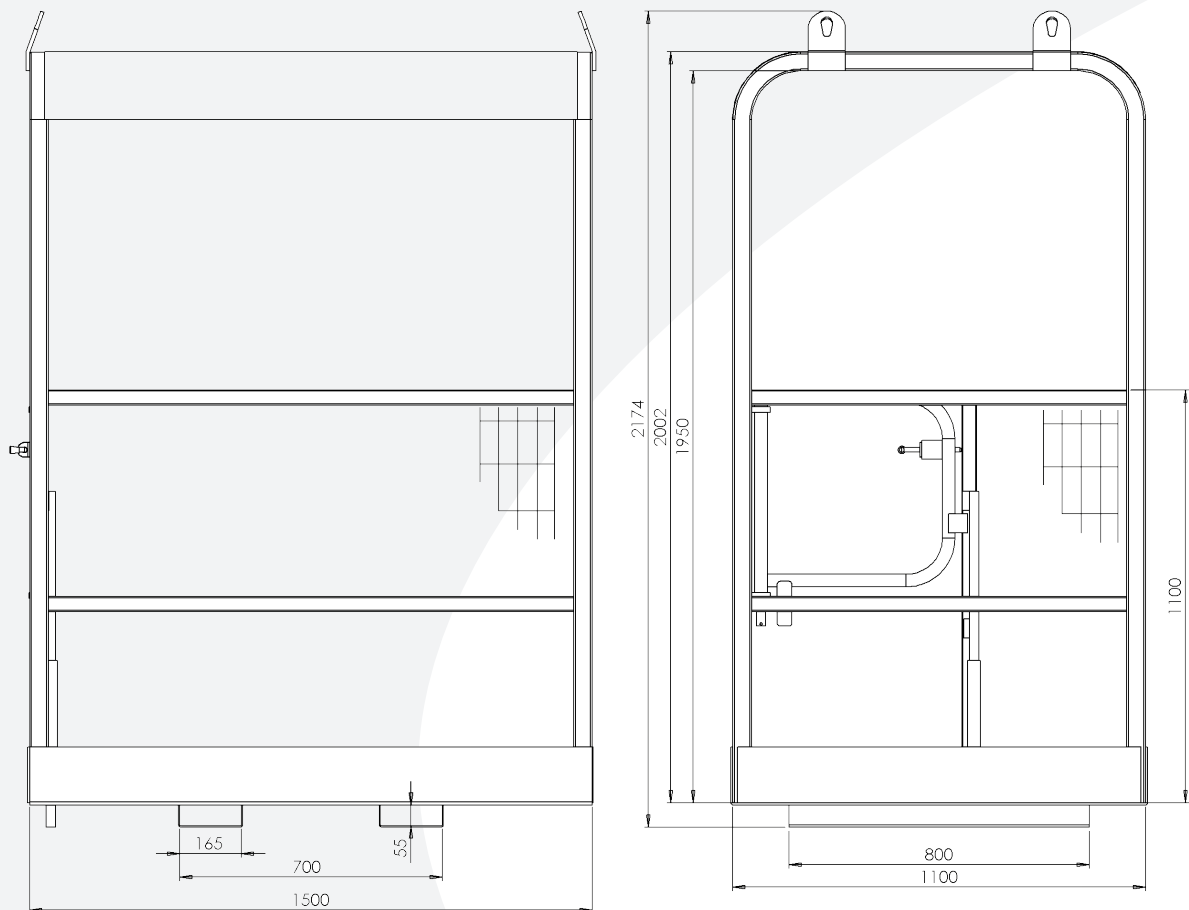

Model Ref	Overall Length (mm)	Overall Width (mm)	Overall Height (mm)	Max Fork Section (mm)	Weight (kg)
FWP-CS-S	1100	1500	2174	140 x 50	226
FWP-CS-G	1100	1500	2174	140 x 50	241