



Fork Extensions (FEX)

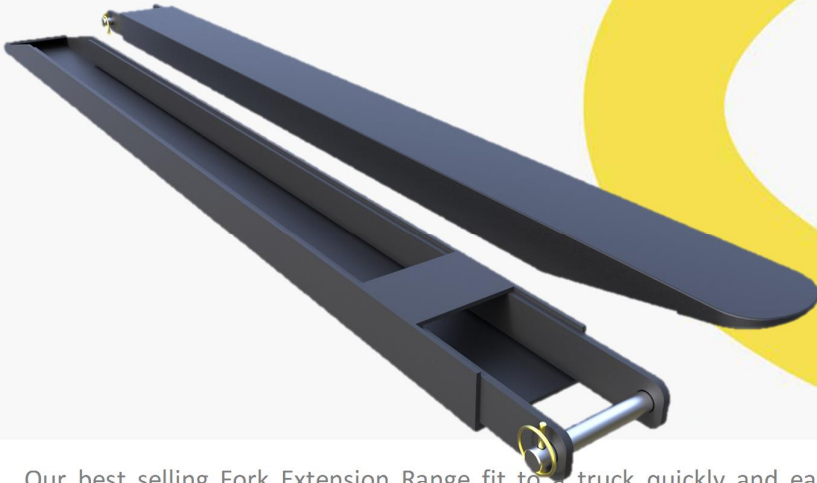

Our best selling Fork Extension Range fit to a truck quickly and easily. Simply; remove the heel pin and drive into the extensions, once fully entered, simple lift and re-fit the heel pin.

CONTACT Fork Extensions are designed to offer occasional long reach and stabilising capabilities. Allow stable and safe handling of loads, which are longer than the truck forks whilst retaining truck manoeuvrability for conventional operation. Our fork extensions come with a closed section at the heel, ensuring suitability for any drop of fork, in compliance with BS EN 13284.

Our range also come with a fully capped rounded toe, for durability and strength, whilst the shape allows easy entry and exit from loads. Our range of extensions are manufactured from a 5mm mild steel pressed section, with two 8mm stiffening plates welded inside each section, ensuring CONTACT extensions are one of the strongest in the market.

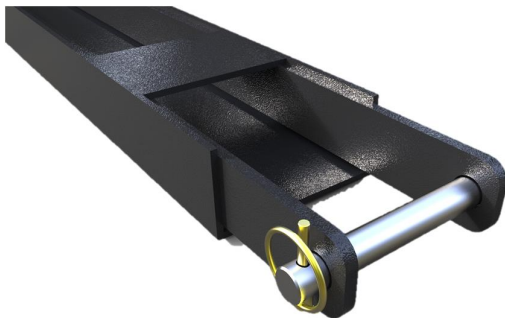

MODEL	MASS (PAIR)	C of G
FEX100-1500	47kgs	644mm
FEX100-1650	51kgs	721mm
FEX100-1800	56kgs	794mm
FEX100-2000	62kgs	894mm
FEX-100-2400	75kgs	1096mm
FEX125-1500	50kgs	649mm
FEX125-1650	55kgs	724mm
FEX125-1800	60kgs	799mm
FEX125-2000	67kgs	899mm
FEX125-2400	80kgs	1099mm
FEX150-1800	66kgs	811mm
FEX150-2000	73kgs	911mm
FEX150-2400	88kgs	1111mm

MODEL	SUIT MAX FORK SECTION	SWL @ LOAD CTR
FEX100-1500	100 x 50mm	3000kgs @ 500mm
FEX100-1650	100 x 50mm	3000kgs @ 500mm
FEX100-1800	100 x 50mm	3000kgs @ 500mm
FEX100-2000	100 x 50mm	3000kgs @ 500mm
FEX-100-2400	100 x 50mm	3000kgs @ 500mm
FEX125-1500	125 x 50mm	3400kgs @ 500mm
FEX125-1650	125 x 50mm	3400kgs @ 500mm
FEX125-1800	125 x 50mm	3400kgs @ 500mm
FEX125-2000	125 x 50mm	3400kgs @ 500mm
FEX125-2400	125 x 50mm	3400kgs @ 500mm
FEX150-1800	150 x 60mm	5800kgs @ 600mm
FEX150-2000	150 x 60mm	5800kgs @ 600mm
FEX150-2400	150 x 60mm	5800kgs @ 600mm

