




# Telescopic Hydraulic Carriage Mounted Jib

Our best selling Telescopic Carriage Mounted Jib offers a flexible method of safely handling loads at different load centres. To fit the jib, simply remove the bottom carriage blocks from the attachment backplate, then simply drive the truck slowly forwards until the truck carriage contacts the jib backplate, then lift the carriage until the top rail fits snugly under the top carriage block on the jib backplate, then simply re-fit the bottom blocks, and the jib is ready to begin lifting. Quick release Blocks can be offered to reduce fitting time, also stands are available to also aid fitting and storage.

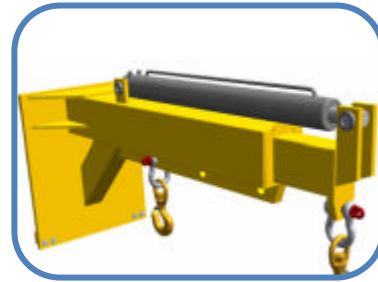

CONTACT Telescopic Carriage Mounted Jibs are a manually extending jib which mounts directly onto the truck carriage. Allows versatility of long reach or alternatively the manoeuvrability of a shorter reach jib.

Model Ref	Truck Capacity (kg)	'A' Hook Height (mm)	'B' Closed Length (mm)	'C' Open Length (mm)	Carriage Class (mm)	'D' Carriage Width (mm)	'Carriage Height (mm)
CMX 500-1.8H	2000	44	1250	2000	2	400	500
CMX 500-2.2H	2500	33	1250	2000	2	400	500
CMX 500-2.7H	3000	121	1250	2000	3	500	600
CMX 500-3.1H	3500	133	1250	2000	3	500	600
CMX 500-3.5H	4000	107	1250	2000	3	500	600

Model Ref	Capacity (kgs) @ Load Centres (mm)			
	1250	1500	1750	2000
CMX 500-1.8H	900	720	580	500
CMX 500-2.2H	1100	1000	850	750
CMX 500-2.7H	1200	1100	900	840
CMX 500-3.1H	1500	1200	1000	900
CMX 500-3.5H	1600	1300	1100	100

