


# Product Guide Sheet


## Wheelie Bin Rotators

To fit the attachment, slide the forks into the fork pockets until they are fully engaged. Screw the clamps down firmly to retain the attachment on the truck.

In order to pick up the wheelie bin for transportation or pouring, set the girdle to the horizontal position by using the handle or chain fitted to the geared Turning Unit/gear box. Remove the pins from the trunnion locators. The truck forks must then be positioned at a height such that the girdle fits around the centre of the bin and the bin trunnions sit into the trunnion locators. The bin is secured by placing the webbing strap hook through the link provided and operating the ratchet lashing unit to tighten the girdle. Replace the trunnion locator pins. Ensure that the drum is held securely before lifting. Once lifted into the pouring position, the bin is rotated by means of the handle or continuous loop chain. The worm gear locks the bin at any desired angle.

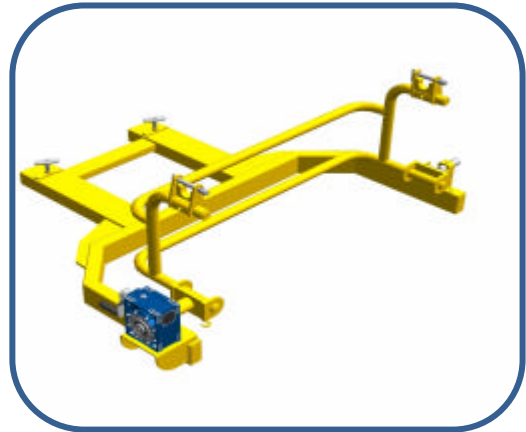

Our Wheelie Bin Rotators are designed to handle large 1100 litre wheelie bins with side trunnions. The attachment provides smooth and safe tipping of the contents and the option to lock the bin in place at any tipping angle. It is highly recommended that a sample bin be provided when ordering this attachment.

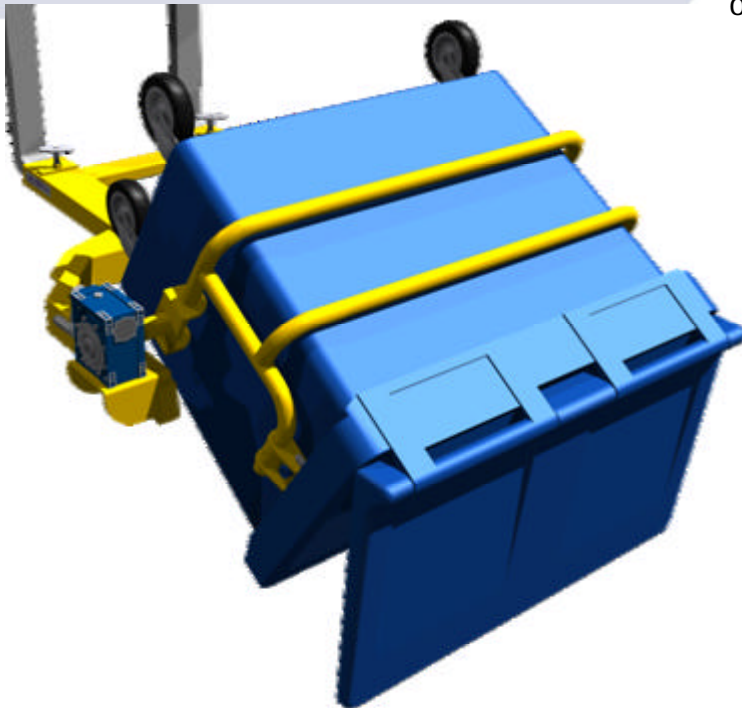

**Ordering Information**  
*Spec of Bin Handled?*  
*Fork Width & Thickness?*  
*Fork Spread?*  
*Truck Capacity?*



Contact's 1100L wheelie bin rotators come in two models, a standard duty and heavy duty, with the max capacities of the units at 250kgs and 500kgs respectively. Please specify the desired model upon order.